



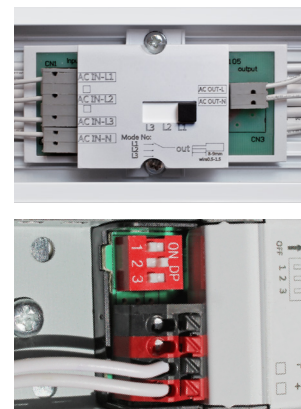

LineLED Modular

for retrofitting standard continuous-row lighting systems

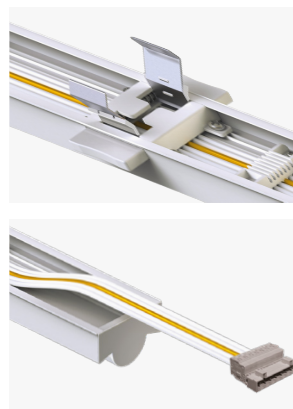

Whether for production facilities, warehouses or sales areas - with the universal LED continuous-row lighting module, you can refurbish existing standard single and double-lamp T5 and T8 trunking in a future-proof way and adapt it precisely to your lighting requirements. Depending on requirements, the colour temperature (3'000K-5'000K) and output can be selected using a slider, allowing maximum flexibility. The constant light output (CLO) ensures a consistently high light level over the entire service life. Quick and tool-free installation and removal is achieved using the click-slide system, which saves valuable time. The simple click-locking system is compatible with almost all continuous-row luminaire manufacturers and enables retrofitting by just one person.

Technical data

Input voltage:	230 VAC
System performance (7-step-adjustable):	25 W - 75 W
Luminous flux:	
– 75W:	11'495 - 12'298 lm
– 65W:	10'050 - 10'847 lm
– 60W:	9'458 - 10'095 lm
– 55W:	8'865 - 9'343 lm
– 45W:	7'224 - 7'679 lm
– 35W:	5'661 - 6'037 lm
– 25W:	4'100 - 4'340 lm
Light colour (adjustable):	3'000K / 4'000K / 5'000K
CRI:	Ra > 80
Beam angle:	120°
Operating life LED:	80'000h L80 B10 (Ta 25°C) 60'000h
Protection category:	IP20
Protection class:	I
Operating range of temperature:	-20°C to +50°C
Material housing:	aluminium
Housing colour:	white RAL 9003
Weight:	~1.6 kg
Dimensions (L×W×H):	1'527×65×50 mm

Product features

- simple installation and removal thanks to click-slide system
- selection of light colour via slider on the luminaire
- soft start and automatic luminous flux adjustment (CLO)
- tool-free phase change via slide control
- 7-stage power regulation from 25 - 75 W via DIP switch
- fully integrated, independent through-wiring
- integrated fall protection
- compatible with many common trunking rails
- compatible with the following manufacturer series:
AEG (MAXOS), Fluolite (TRX/TRZ), LITE Licht (Q-Rail/TS),
Philips (MAXOS, TTX200/TTX400), Regiolux (SDT/SPT/SMT),
RIDI (VLT/VLG/SLG), Siteco (DUS/Modario), VEKO (PNR),
Trilux (E-Line), Zumtobel (Z×1/Z×2)

Item no.	Designation
861126	LineLED Modular, 230VAC, adjustable: 25W-75W (4'100 - 12'298lm); 3'000K/4'000K/5'000K

Accessories/spare parts	
861128	Blind cover vor LineLED Modular, aluminium white, 1'527×65×20 mm
861129	Feeding for LineLED Modular (plug with quick-release terminals), wiring 5×2.5 mm ²
861130	Connection cable 1.5m for LineLED Modular, plug on both sides, wiring 5×2.5 mm ²
861127	Connection cable 3m for LineLED Modular, plug on both sides, wiring 5×2.5 mm ²